

3G&WIFI Setting

3G Setting:

- A. First of all, make sure that your 3G sim card is WCDMA 3G sim card, and also do not use 4G LET sim card to try to go on setting, just can be WCDMA 3G sim card.
- B. Make sure of the 3G antenna is to connect with MDVR very well.

And then start to go the 3G setting by 3 steps:

1st Step: **Lan setting**


Re: Come into Lan setting and go on the setting like this please:

“ Network Type”: 3G-WIFI, “DHCP” : On

“Server IP” :219.134.190.134 or cvideoview.com

(Noted: If you use cvideoview.com, you need to change the DNS to be yours)

“ Server Port”:8101

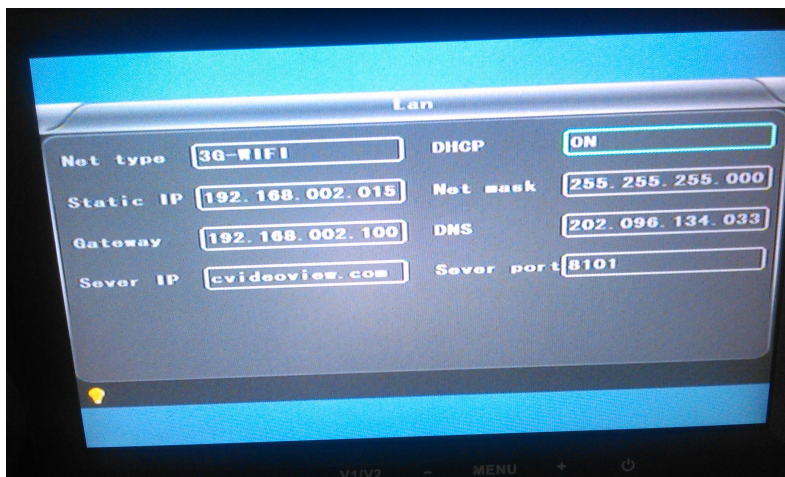

2nd Step: **3G Setting**

Re: Come into 3G setting and go on the setting as fellows please:

Input: 1.**APN: Get it from 3G sim card or your 3G carrier**

2.**Dial-Up Number: *99#(Keep it unchanged)**

3.**User name: 3G sim card user name, if no, leave it alone please**

4.**Password: 3G sim card password, if no, leave it alone please.**




3rd Steps: **Restart MDVRs**, and the 3G led light is on, Done. Come into the CMS software as fellow information please to find your device for live viewing live videos:

Server:219.134.190.134

Port:9001

Name: use

Password: pass

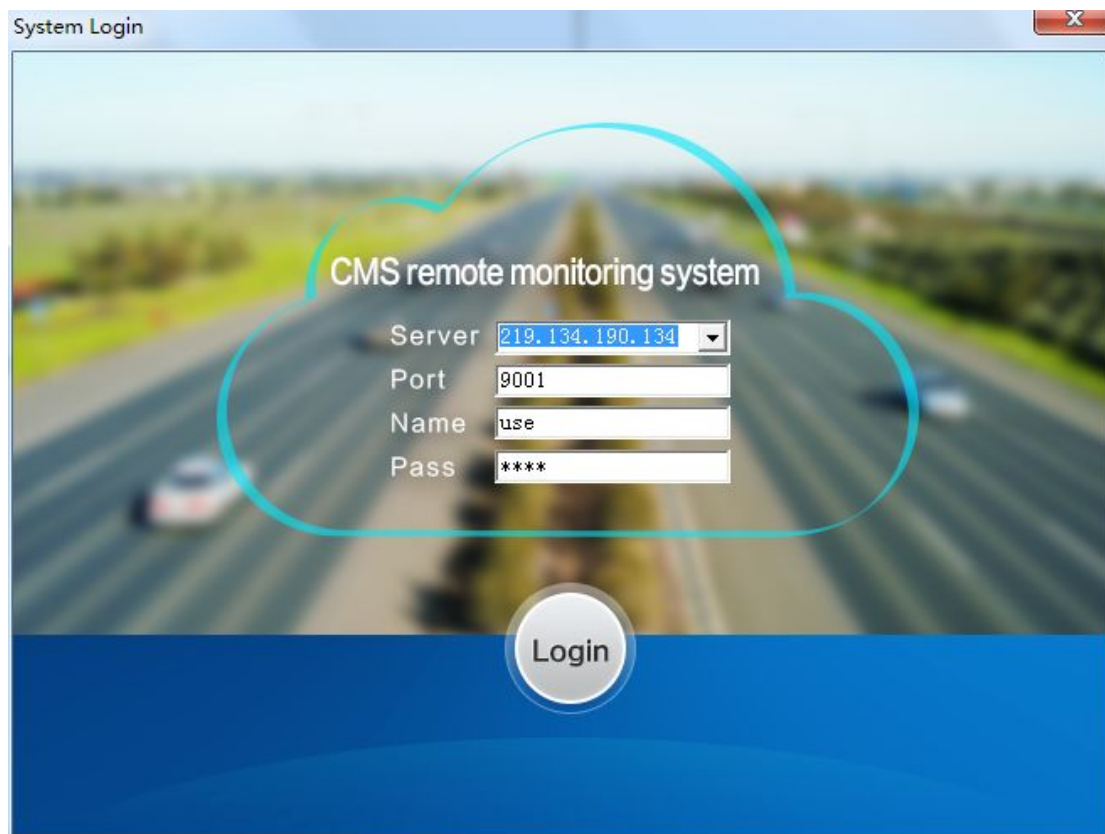

WIFI Setting

For the WIFI setting, we will go on 3 steps:

1st Steps: **Lan Setting**

Re: Come into Lan setting and go on the setting like this please:

“ Network Type”: 3G-WIFI, “DHCP” : On

“Server IP” :219.134.190.134 or cvideoview.com


(Noted: If you use cvideoview.com, you need to change the DNC to be yours)

“ Server Port”:8101

2nd Steps: **WIFI setting**

Re: Come into WIFI setting, and go on the setting like this please:

1. SSID: WIFI user name
2. Password: WIFI password
3. Encryption and Certificate, keep the same, and they are unchangeable.

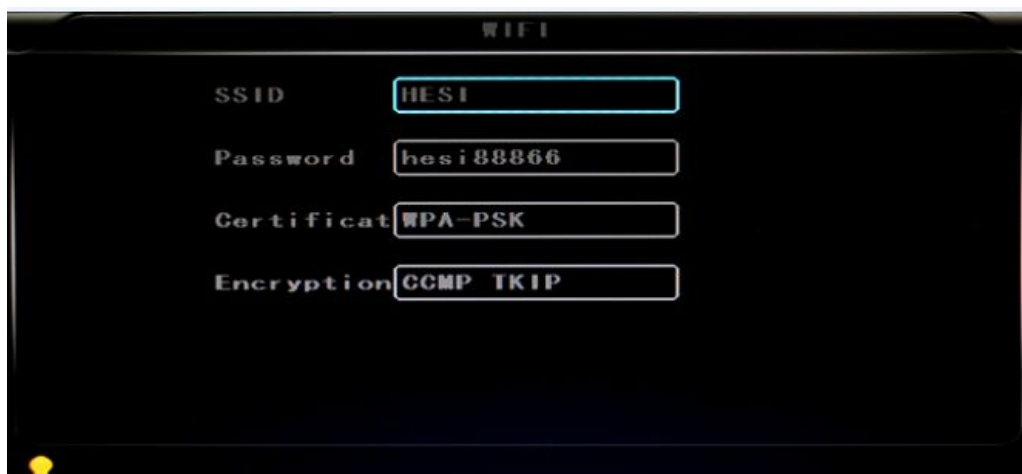


3rd Steps: **WIFI Router Setting:**


Re: Come into WIFI Router webpage, please. Go on setting to make “Certificate” &“Encryption”

In the WIFI Router keep the same as that in WIFI setting. That means:

Certificate Must be WPA-PSK in the WIFI Router

Encryption must be CCMP TKIP in the WIFI Router

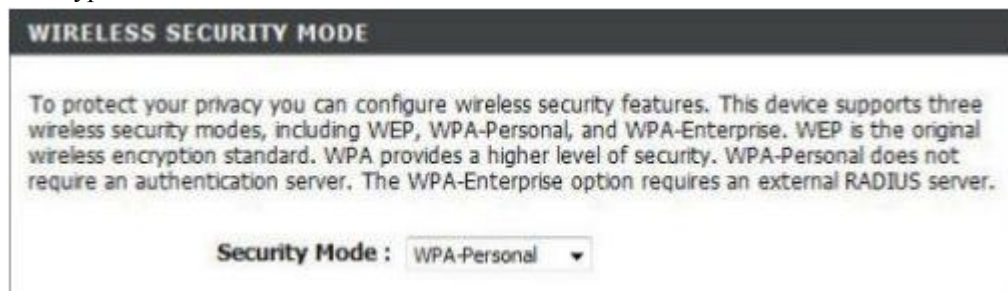

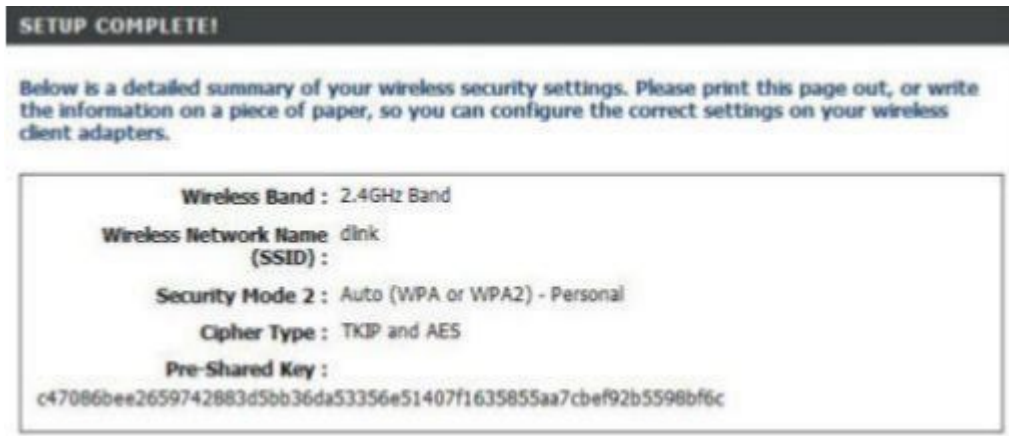


After this, restart MDVR and WIFI Router, the WIFI Led light is on, it will be ok.

3.How the WIFI function working:

A. At first, our Mobile DVR has 3G/WIFI automatic Swift function, that means When 3G and WiFi are enabled at the same time, WiFi will has first priority for using.

B. WIFI automatic downloading functions setting on CMS software, that means when you go on the setting, once MDVR check the WIFI signal, our CMS software will automatic download the videos into your computer or server.

Check the picture as fellows please: Click “ download” and then “advanced” and then Click “Enable WIFI download” to start the WIFI automatically downloading functions.

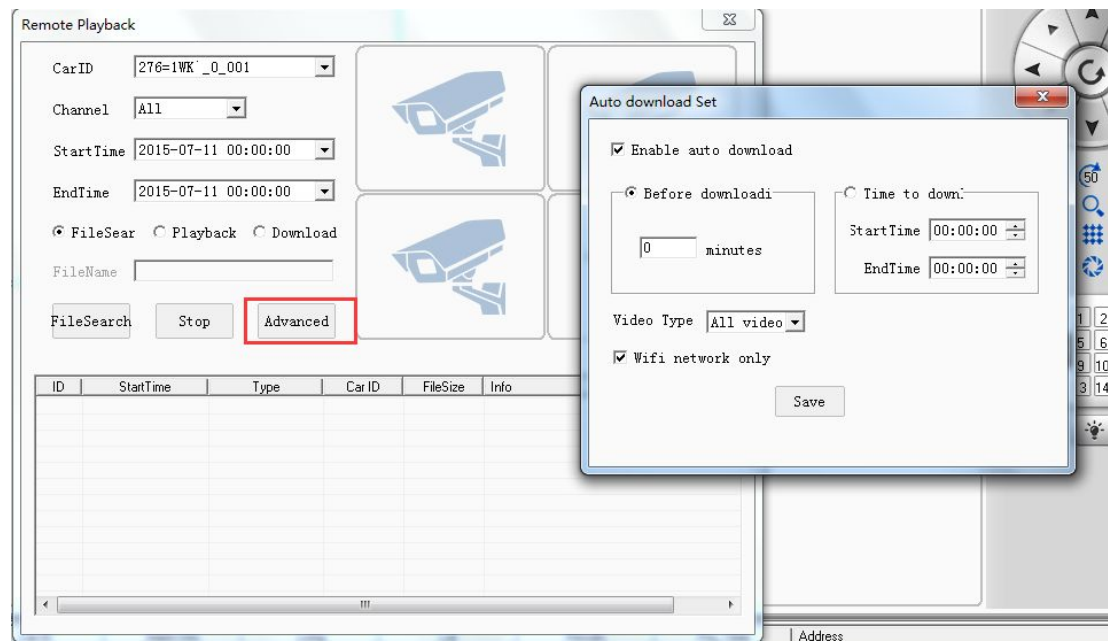

After downloading, you can settle the downloading rout on CMS software:

Param Set

System set

- Base Set
- Info Cfg
- Cycel Wheel
- Database Config
- Other Cfg

Device Param

- Base Set
- RecordSet

External device contro

- LED screen control
- LED Strip screen
- Trans Info
- Bus_Report

MapShow

Open Close

Trans Type

UDP TCP

Speed Unit

Km/h Miles/h

Timeout time s

Video bak

Snapshot bak

DownloadPath

Alarm Type

HDD Fail Online G_Sensor

Overspeed StopWork OverLine

VideoLoss MotionDet LimitSpee

GPS offset

Lat

Long