

LCD-HD Analog Monitor

User Manual v20160601



LCD Color Monitor

Please read this manual thoroughly before operating the unit, and keep it for further reference.

1. Contents

1. Contents.....	2
2. Precautions.....	2
3. Maintenance.....	3
4. Parts Identification.....	4
5. Features.....	4
5. Technical Specifications.....	5
6. Basic Operation.....	6
7. Basic Operation.....	7
8. Remote Control Operation.....	8
9. Accessories.....	9

2. Precautions

● Storage and keeping

1. Do not expose the monitor to excessive heat or cold. The storage temperature of this device is -30 ~+80°C, and the operating temperature is -10 ~+65°C. The Humidity is Rh90%.
2. Never use this device near water or conductive liquid.
3. Never use this device in environments with excessive moisture, dust or smoke.
4. Avoid dropping or striking this device.
5. Avoid using this device in enclosed spaces, areas with excessive vibration or subject to severe impacts.
6. Never puncture, scratch or use abrasive cleaning materials on this device.
7. Do not place cables where they may be pinched or stepped on.
8. Leave at least a 2" space between the monitor and walls, cabinets or other objects to allow adequate air circulation around the unit.
9. The monitor is not designed to be waterproof.

● Operating Precautions


1. The device may be powered by a 12v or 24 volt automotive battery or vehicle electrical system.
2. Make sure all cables are connected properly observe polarity. Improper cable connections may damage the monitor. Remove the power cable connections when you do not intend to use the unit.

Warning!

1. High voltage is present within the monitor. The opening of the case should be by professionals.
2. Do not watch the video while driving unless you are monitoring the rear view camera display.

3. Maintenance

1. Remove all the cable connections from the monitor before cleaning the unit.
2. Use a mild household detergent and clean the unit with a slightly damp, soft cloth. Never use strong solvents such as thinner or benzene, as they might damage the finish of the device.

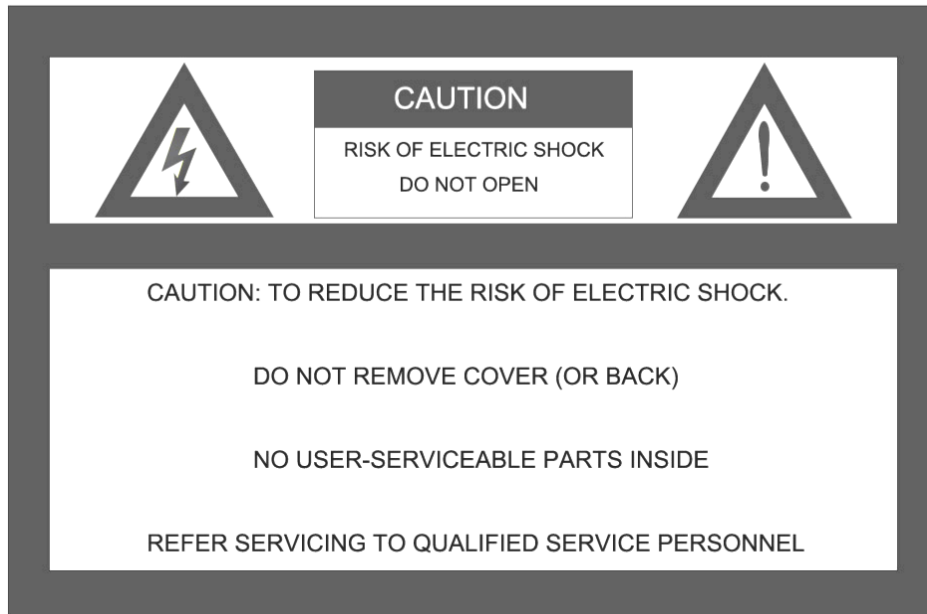

This symbol is intended to alert the user to the presence of un-insulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute risk of electric shock to persons.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



This symbol is intended to alert the user not to waste electrical and electronic equipment.

CAUTION

You are cautioned that any changes or modifications not expressly approved in this manual could void your warranty and necessitate expensive repairs.

● **Declaration of conformity**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including Interfered that may cause under sired operation



4. Parts Identification



- (1) Decrease button – For adjusting of Volume, Brightness, Contrast, Language, Rotation, ect.
- (2) Increase button – For adjusting of Volume, Brightness, Contrast, Language, Rotation, ect.
- (3) MENU – Access Brightness, Contrast, Language, Rotation, etc.
- (4) CAM – Switches between all cameras Connected to Monitor.
- (5) MODE – Selects Single View/Split view/Quad view selectable Day & Night selects based on without split function
- (6) POWER – Turns monitor On and Off.
- (7) IR

5. Product Features

1. TFT LCD monitor with wide angle view and high resolution display.
2. Picture image may be adjusted for Horizontal, Vertical, Mirror and Normal viewing.
3. Select from 7 languages for user operation.
4. Mirror and Normal switch available.
5. Full-function remote control.
6. Multiple video formats available: PAL / AUTO / NTSC.
7. Up to 2 or 4 AV inputs. Automatically switch to back-up camera views.
8. Power supply: 12~24V.
9. On-board speaker.


5.1 Technical Specification

1. 7" color monitor.
2. Audio output: 0.5W
3. Loudspeaker: one 15x40mm round loudspeaker.
4. Power supply: 12~24V
5. Power consumption: 4W Maximum
6. Outer dimension: 180(L) X 42(W) X 125(H) mm
7. Simulation Screen Resolution: 480 X 3 X (RGB) X 234
8. Digital Screen Resolution: 800 X 3 X (RGB) X 480
9. Contrast: 500:1
10. Brightness: 400cd/ m².
11. Viewing angle: U: 50°/ D: 60°, R/L: 70°
12. Operating temperature: -10°C~+65°C
13. Storage temperature: -30 to + 80 RH90%


⚠ Special Notice

All specifications are subject to change without notice.


6. Basic Operation

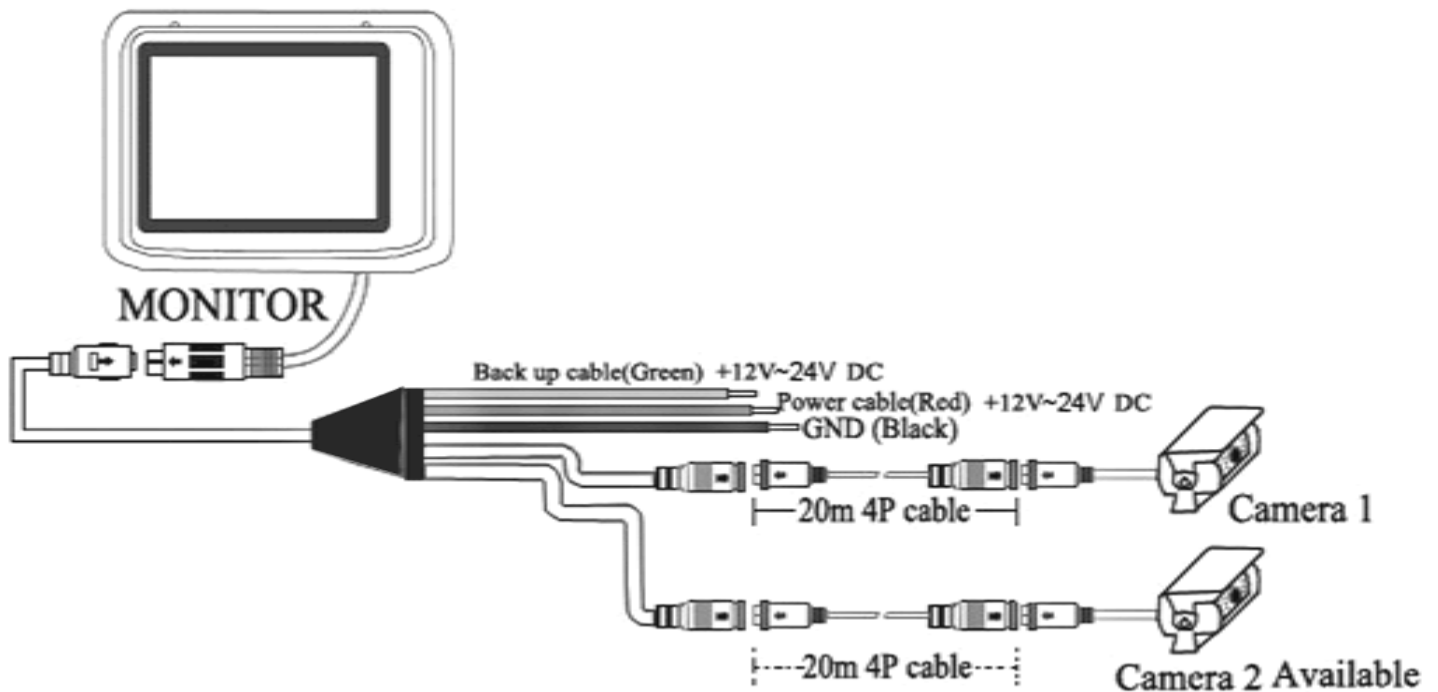


- ① **Black:** Ground
- ② **Red:** ACC (Car key power. DC12V~24V)
- ③ **Green:** Trigger Cam 2 (Reversing light power positive. DC12V~24V)

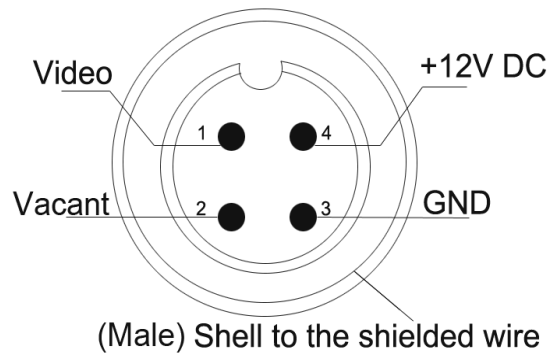


7. Basic Operation

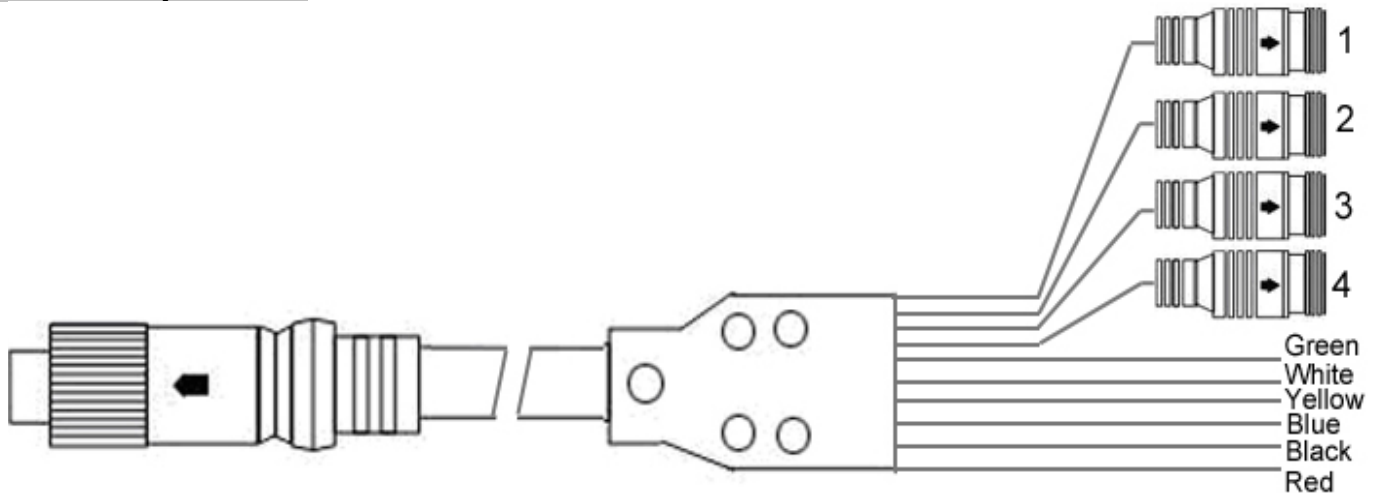

- (1) Green---Trigger Cam 1 (Reversing light power positive. DC12~24V)
- (2) White---Trigger Cam 2 (Optional. DC12~24V)
- (3) Yellow---Trigger Cam 3 (Connect positive end of left reversing light. DC12~24V)
- (4) Blue---Trigger Cam 4 (Connect positive end of right reversing light. DC12~24V)
- (5) Black---Ground.
- (6) Red---ACC (Car key power. DC12~24V)

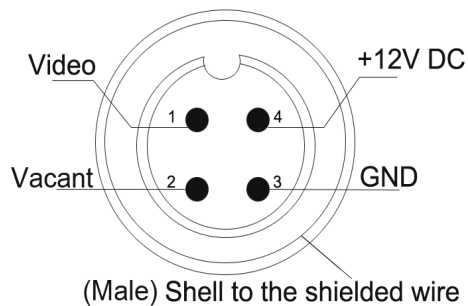

8. Remote Control

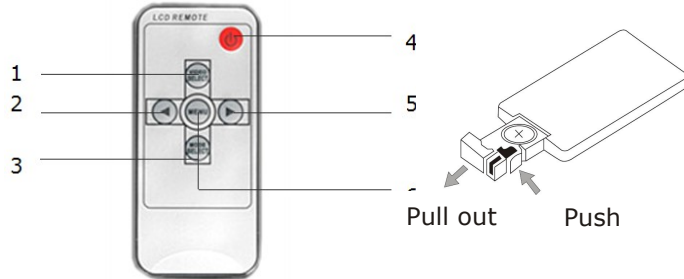

- (1) Video select
- (2) Decrease button
- (3) Mode select
- (4) Power on/off
- (5) Increase button
- (6) Menu



- (1) Power on/off
- (2) Decrease button - For adjusting of Volume, Brightness, Contrast, Language, Rotation.....
- (3) Upwards select
- (4) Select channel 1 full display
- (5) Select channel 3 full display
- (6) Menu - Access Brightness, Contrast, Language, Rotation, etc.
- (7) Quad- Select split view
- (8) Downwards select
- (9) Increase button - For adjusting of Volume, Brightness, Contrast, Language, Rotation.....
- (10) Shift-Select split view
- (11) Select channel 2 full display
- (12) Select channel 4 full display

9. Accessories



2CH Connection Cable



4CH Connection Cable



Mount Bracket



2CH Remote Control



4CH Remote Control

⚠ Special Notice

Occasionally, a few highlights or dark spots may occur on the LCD screen. This is a very common phenomenon in active matrix display technology, and doesn't necessarily indicate any defects or faults. Never try to repair this device by yourself. In case of any problems, please turn off the display at once and notify our company or authorized dealer. The monitor is a complex device. Any disassembly or modification may lead to damage and void the warranty.

AMERICAN BUS VIDEO

2545 Valley Ridge Drive
Cumming, GA 30040 USA

Tel: 770.263.8118

sales@AmericanBusVideo.com

Fax: 770.887.5944

AmericanBusVideo.com

SchoolBusCamera.com

VehicleVideoCameras.com

FleetDriverRiskManagement.com

29 Years of Mobile Digital Sales & Service Experience